

Features Of BXII Series


Offers Speed Control / Positioning Control & Torque Limiting


Speed control, positioning control and torque limiting work exactly as a servo motor.

- Speed Range: 2~4000 r/min
- Speed Regulation ±0.05%
- Built-in positioning function
- 16 positioning data
- Torque limiting

Ease of use and highly reliable at an affordable price.

- Digital setting and operation
 - Alarm function
- Lineup: 30~400 W

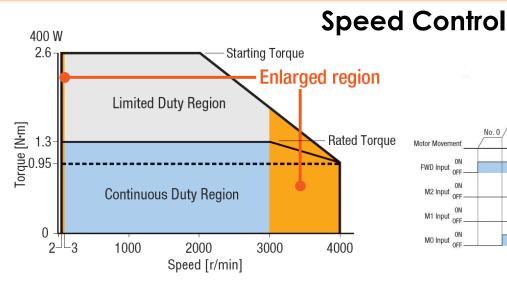




Speed Control Range: 2 ~ 4000 rpm.

Speed selection up to 16 different settings.

Position Control




- *Dwell time is the waiting time for the next positioning operation to start.
 - Motor setting of torque 0 ~ 250% could be set at 1% increment.
 - Torque limiting can be switched by external signals (On/Off).

- Driver position operation without control module.
- Operation data up to 16 points.
- Three types of operation functions. (Independent or Linked).


Improved torque limiting accuracy.

User Friendly



Torque Limiting





- Simple Data Setting.
- Installation Space saving on driver.
- Easy data editing and monitoring.

You're Invited to our Seminar *Door gift will be given			will be given
Date	Time	Seminar Name	Name of Venue
2017-08-16	13:00-16:00	Troubleshooting Seminar	31, Kaki Bukit Road 3, #04-02/04, Techlink, 417818, Singapore

CLICK TO REGISTER HERE!